




Technical Specifications

- AC power: standard 120VAC, 15-amp outlet
- Customer supplied 80 psi compressed air for clamp operation
- Auto-set clamping mechanism
- Dual adjustable clamp pressures
- Four rubber clamps for secure handling
- Tested with 3,500 lb. load capacity
- Optional risers for tall loads
- Requires minimal 7' x 7' footprint and 13 ft height clearance

Key Benefits

- Split pallets, remove damaged layers, and combine loads efficiently
- Reduces manual loading time by at least 50%
- Operator-friendly design with training completed in one hour
- Low-maintenance operation for long-term reliability
- Compact design integrates easily into existing workflows
- Quick installation and setup, set to run in 6 hours

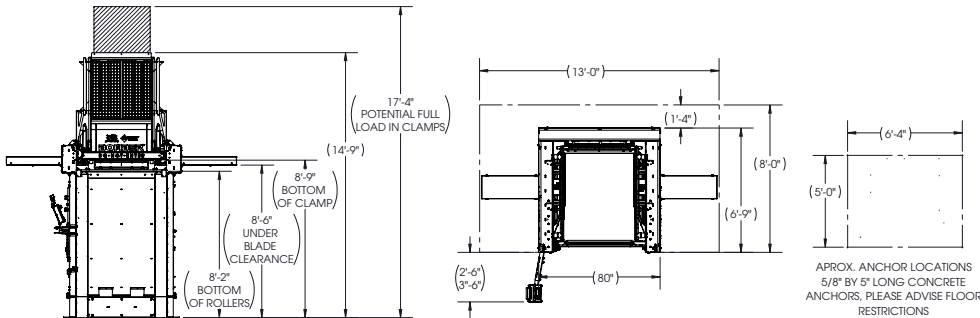

SPECIFICATIONS

Available configurations	44 in and 50 in Bomber variants
Product width range	31-50 in
Product depth range	30-56 in
Overall height range	14 ft 9 in to 16 ft 8 in
Power	120VAC @ 15 amp
Air	2 CFM @ 80 PSI; 1/2 in NPT female
Cycle time	30 sec
Approx. equipment weight	6,100 lb / 2,800 kg
Final configuration note	Final configuration should be confirmed against customer product, pallet type, facility layout, guarding, and approved purchase specification.