


HuskyLite® Plastic Pallets

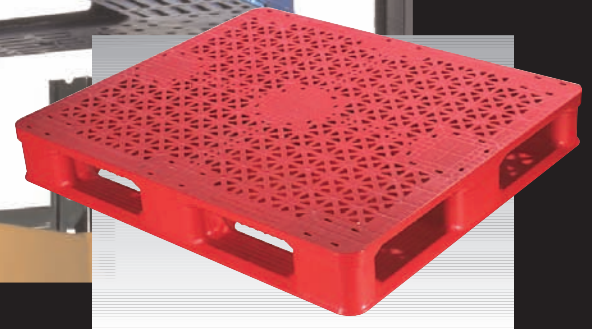

Injection Molding Makes A Difference

Rehrig Pacific HuskyLite® plastic pallets offer a lighter more durable alternative to wood pallets. The high cost of frequent pallet repairs and replacement can be eliminated with well constructed plastic pallets. High-pressure injection molding allows Rehrig Pacific designers to strategically vary wall thickness to achieve lighter yet stronger pallets compared to other molding processes.

Longer Life and Improved Efficiency

- High-impact plastic resin
 - Four-way entry
 - Consistent dimensions
 - Textured top deck
 - No loose fasteners or splinters
 - UL® listed flame retardant pallets
- also available



HuskyLite® Plastic Pallets⁺

www.rehrigpallets.com



SPECIFICATIONS																	
				Width (W)		Length (L)		Height (H)		Weight		Maximum Static Load		Maximum Dynamic Load		Maximum Edge Rackable Load ¹	
Product	Entry	Reinforcement	Features / Options	in	mm	in	mm	in	mm	lb	kg	lb	kg	lb	kg	lb	kg
1-Piece	4-way	non-reinforced		32.0	813	37.0	940	5.5	140		0.0	30,000	13,600	5,000	2,265	2,500*	1,135*
Edge rack load depends on pallet orientation. 2,500 lb. across 32" span, 1,500 lb. across 37" span.																1,500	680*
1-Piece ²	2-way	reinforced	2.5" (63.5mm) outside stringers	40.0	1,016	40.0	1,016	5.0	127	41.0	18.6	30,000	13,600	4,000	1,800	3,000	1,360
1-Piece ²	2-way	non-reinforced	2.5" (63.5mm) outside stringers	40.0	1,016	40.0	1,016	5.0	127	33.0	15.0	10,000	4,500	2,500	1,135	N.E.R.	N.E.R.
1-Piece ²	2-way	reinforced	3.8" (96.5mm) outside stringers	40.0	1,016	40.0	1,016	5.0	127	42.0	19.0	30,000	13,600	4,000	1,800	3,000	1,360
1-Piece ²	2-way	non-reinforced	3.8" (96.5mm) outside stringers	40.0	1,016	40.0	1,016	5.0	127	34.0	15.4	10,000	4,500	2,500	1,135	N.E.R.	N.E.R.
Rackable ³	4-way	non-reinforced		36.0	914	48.0	1,219	6.0	152	39.3	17.8	30,000	13,600	4,000	1,800	2,400	1,090
Rackable ³	4-way	non-reinforced		37.0	940	37.0	940	6.0	152	31.4	14.2	30,000	13,600	4,000	1,800	2,000	900
Rackable ³	4-way	non-reinforced		37.0	940	43.0	1,092	6.0	152	36.8	16.7	30,000	13,600	4,000	1,800	2,250	1,020
Rackable ³	4-way	non-reinforced		37.4	950	41.3	1,050	6.0	152	33.3	15.1	30,000	13,600	4,000	1,800	1,750	800
Rackable ³	4-way	non-reinforced	0.25" (6.4mm) corner lips ⁴	40.0	1,016	48.0	1,219	6.0	152	44.2	20.0	30,000	13,600	4,000	1,800	2,000	900
Rackable	4-way	non-reinforced		43.3	1,100	47.2	1,200	5.9	150	48.4	22.0	30,000	13,600	4,000	1,800	2,200	1,000
Rackable	4-way	reinforced		43.3	1,100	47.2	1,200	5.9	150	59.6	27.0	30,000	13,600	4,000	1,800	3,000 ⁵	1,364 ⁵
Rackable	4-way	non-reinforced		43.3	1,100	48.8	1,240	5.9	150	50.4	22.9	30,000	13,600	4,000	1,800	2,200	1,000
Rackable	4-way	reinforced		43.3	1,100	48.8	1,240	5.9	150	61.6	27.9	30,000	13,600	4,000	1,800	3,000 ⁵	1,364 ⁵
2-Piece	4-way	reinforced	0.625" (15.9mm) std. perimeter lip ⁴	48.0	1,219	48.0	1,219	6.0	152	75.0	34.0	30,000	13,600	4,000	1,800	2,000	900
2-Piece	4-way	non-reinforced	0.625" (15.9mm) std. perimeter lip ⁴	48.0	1,219	48.0	1,219	6.0	152	70.0	31.8	30,000	13,600	4,000	1,800	2,000	900
Nestable ⁶	4-way	welded only	0.20" (5.1mm) perimeter lip ⁴	40.0	1,016	48.0	1,219	6.5	165	26.3	11.9	6,000	2,720	3,000	1,360	N.E.R.	N.E.R.
Box Beam ⁶	4-way	welded only	0.25" (6.4mm) edge lips ⁴	40.0	1,016	48.0	1,219	5.6	142	45.8	20.8	30,000	13,600	5,000	2,265	2,800	1,270
Slave Board ⁶	n.a.	welded only		40.0	1,016	48.0	1,219	1.25	32	29.5	13.4	30,000	13,600	n.a.	n.a.	N.E.R.	N.E.R.

¹ Rating based on continuous 2" (51mm) wide support for the entire length of pallet short sides, except where noted.

² Available with 0.15" (3.8mm) perimeter deck lip.

³ Available with flame retardant polypropylene resin. FR pallets have passed flame retardancy tests in accordance with UL 2335 Classification

⁴ Optional, not included in specifications.


⁵ Rating based on continuous 2" (51mm) wide support for the entire length of pallet long sides.

⁶ With ergonomic molded-in handholds.

N.E.R. = Not edge rackable

n.a. = not applicable

+ In keeping with our goal of continuing product improvement, Rehrig Pacific Company reserves the right to change materials, designs, and specifications without notice or obligation. Product performance can vary with application and environment. Check with Rehrig Pacific to determine product suitability for your application.



Rackable Pallets

Innovative two piece snap lock construction holds the top deck securely, yet safely releases when it is abused. Pallet halves easily reconnect without any tools.

- Repairable
- General purpose pallet



Box Beam Pallets

The best strength-to-weight-ratio of any heavy-duty plastic pallet on the market. The unique design elements and manufacturing method combine to reduce center flex and provide even weight distribution, resulting in a more stable load.

- Higher loads & superior edge-racking
- Light weight, heavy duty, easy handling

Plastic Pallet Benefits

- Uniform weight distribution = safer, more stable loads
- High-pressure injection molded = easily cleaned non-absorbent surfaces
- Dimensional consistency = improved operational efficiency
- No splinters or metal fasteners = reduced damage and employee injuries



4010 East 26th Street • Los Angeles, California 90023
 (323) 262-5145 • FAX: (323) 269-8506 • (800) 421-6244
 info@rehrigpacific.com • www.rehrigpacific.com