




Features & Benefits

- Thermoformed using high molecular weight polyethylene resin for superior durability and performance
- Aluminum reinforcements provide support and stability by equally distributing load throughout top deck and legs
- Compatible with Rehrig's integrated delivery system for increased driver efficiency and retention by reducing delivery time, case touches, and fatigue at each stop
- Optimal footprint with 4-way entry enables faster deliveries through narrow doorways and improves maneuverability in aisle, cooler, freezer, and dry areas
- Highly nestable design enhances overall productivity and saves space when empty in warehouse, at stores, and on backhauls
- Lightweight design reduces injuries and promotes safe handling practices throughout supply chain
- Perimeter lip helps secure and protect product against damage and unnecessary replacement costs
- Flow-through design for ease of cleaning and draining potential trap points

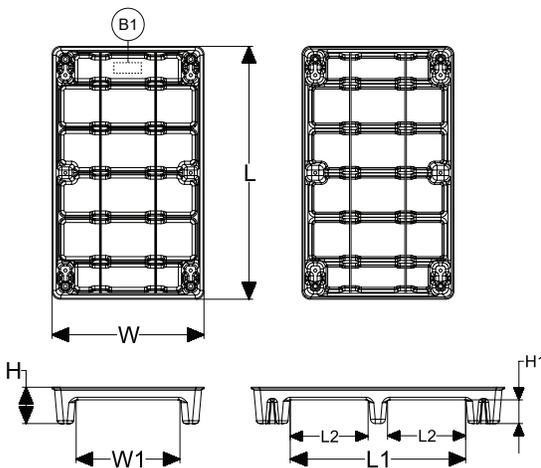

SPECIFICATIONS	IN/LB	MM/KG
Length (L)	40.75	1,035
Width (W)	24.0	610
Height (H)	5.75	146
Overall Fork Pocket Width (W1)	16.4	417
Overall Fork Pocket Length (L1)	27.75	705
Individual Fork Pocket Length (L2)	12.3	312
Fork Pocket Height (H1)	3.75	95
Weight	14.0	6.4
Nest Increment	2.0	51
Dynamic Load Rating	1,250	567
53' Trailer Quantity	2,160	

DECORATION AREAS	WIDTH (IN)	HEIGHT (IN)
Brand Area (B1)	6.0	2.0

Options

- Available in black only
- Molded-in logos available for customer specific branding on top deck
- RFID compatible, works with Vision™ Software solution