




Technical Specifications

- AC power: standard 120VAC at 15-amp outlet
- Customer supplied 80 psi compressed air
- Dual adjustable clamp pressures
- Requires minimal 7x7-ft. floor space
- Tested with 3,500 lb. loads
- PalletX Complex: four rubber clamps for complex loads
- PalletX High Speed: two rubber side clamps for simple loads
- Optional blades for complex loads

Key Benefits

- Exchange pallets in less than 30 sec
- Installation and set to run in 6 hours
- Operators trained in one hour
- Low maintenance
- 50% reduction in load transfer time
- Strong ROI
- 33% reduction in product damage

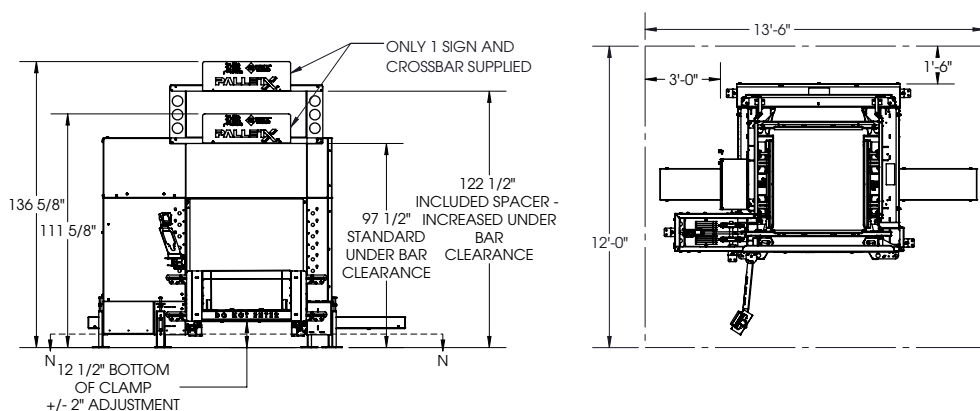

SPECIFICATIONS	
Available configurations	Fast layout, 42 in complex, and 50 in complex configurations
Product/load width range	29-50 in
Product/load depth range	Up to 53 in
Setup / overall height range	92-3/4 in to 136-5/8 in
Power	120VAC @ 15 amp
Air	2 CFM @ 80 PSI
Cycle time	30 sec for complex configurations
Approx. equipment weight	5,000 lb / 2,300 kg for complex configurations
Final configuration note	Final configuration should be confirmed against customer product, pallet type, structural load integrity, facility layout, guarding, and approved purchase specification.